
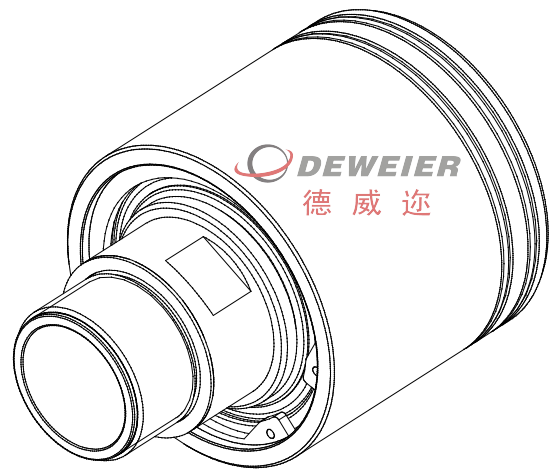


DGR50-2000-03R

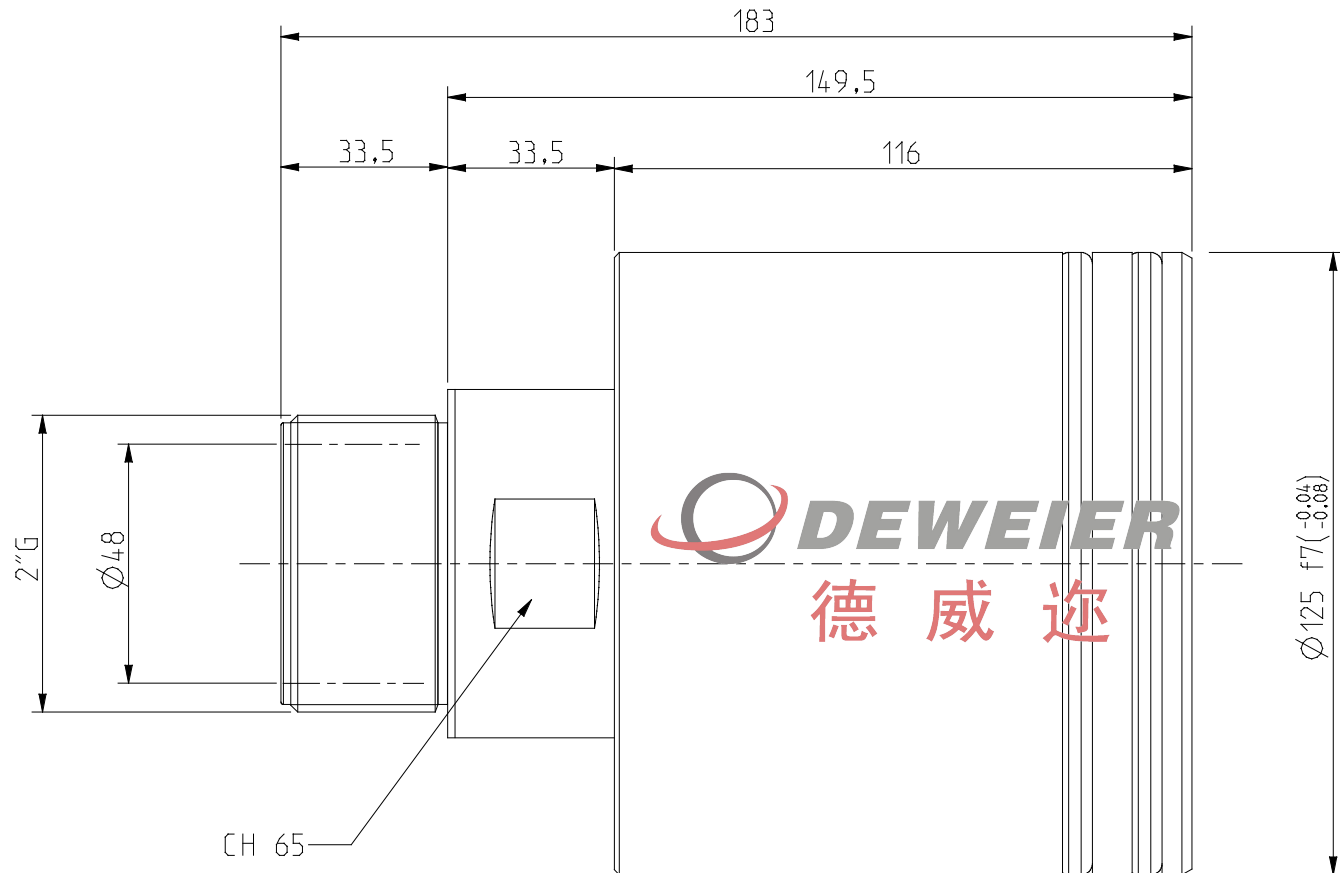

枣庄市德威迩机械科技有限公司

Dewel Machinery Technology Co., Ltd.

技术参数 TECHNICAL PARAMETERS

使用参数 Working parameters

| 技术参数 TECHNICAL PARAMETERS  |   | 使用参数 Working parameters  |             |                |                   |
|--|---|--|-------------|----------------|-------------------|
|  |   | 介质 Fluid   | 压力 Pressure | 温度 Temperature | 转速 Rotating speed |
| MAX. PRESSURE  | 1.6MPa; (16Bar)                           | 空气 Air   | 1.0MPa;     | -30℃----+120℃  | 500RPM            |
| MAX. SPEED   | 750RPM;                                   | 水 Water  | 1.1MPa;     | -30℃----+120℃  | 750RPM            |
| TEMPERATURE  | -30℃----+120℃                             | Double high-precision groove ball bearings for high stability.<br>Balanced mechanical sealing structure for prolonged service life.<br>Standard Sic/Carbon Graphite sealing pair for good sealing performance. Optional Sic/Sic, Tungsten carbide/Tungsten carbide and other sealing pairs for strict environment. |             |                |                   |
| MEDIA TYPE 介质  | water/Hot water/air/oil<br>热水/冷却水/压缩空气/油品 |  |             |                |                   |
| 备注: 技术参数数据为最大值, 并不能同时使用;<br>The technical parameter data is the maximum value and cannot be used at the same time. |   |  |             |                |                   |

订货编号 Order-No.

| Copper 铜壳   | Aluminum 铝壳  | Stainless 不锈钢壳   |
|---|--|--|
| DGR50-2001-03R  | DGR50-2002-03R   | DGR50-2003-03R   |
| 适用介质: 水/热水/油品等<br>Applicable medium:<br>water/hot water/oil | 适用介质: 压缩空气/液压油等<br>Applicable medium:<br>compressed air<br>hydraulic oil | 适用介质: 冷却水/切削液<br>Applicable medium:<br>water/cutting fluid |

**旋转接头**  
Rotary joint

E-mail: [sddeweier88@163.com](mailto:sddeweier88@163.com)

  
www.sddeweier.com

TEL: +86 632 5822778  
TEL: +86 632 5832779

P/N: DGR50-2000-03R